


# FLAT BED SEMI-TRAILER

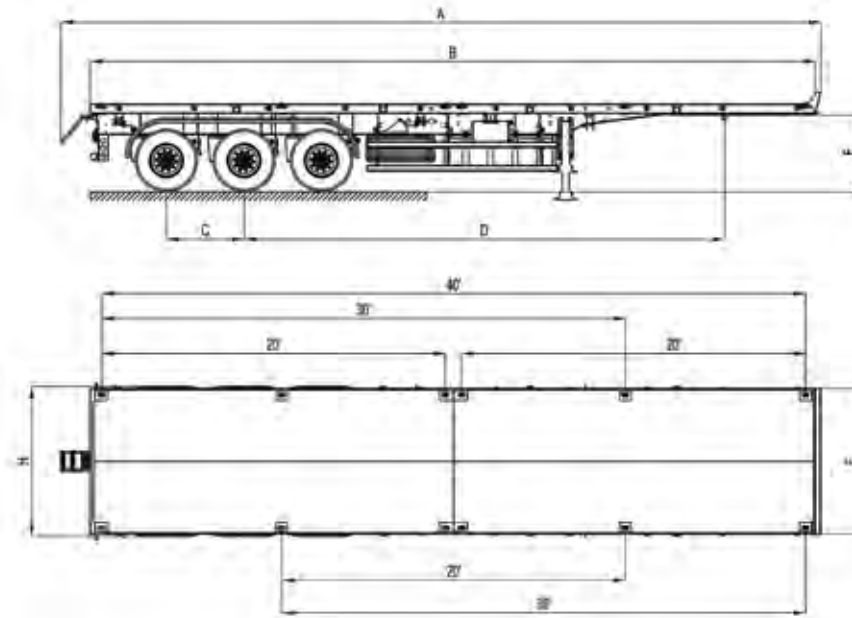

	OVERALL LENGHT (mm)	INNER LEGNHT (mm)	DISTANCE BETWEEN AXLES (mm)	DISTANCE BETWEEN CENTRAL AXLE-KING PIN (mm)	RECOMMENDED FIFTH WHEEL HEIGHT (mm)	INNER WIDTH (mm)	OVERALL WIDTH MAX. (mm)
FLAT CONTAINER	A	B	C	D	M	N	H
	12940	12360	1320	7785-8190	1300	2480	2550

## TECHINCAL SPECIFICATIONS OF FLAT BED SEMI-TRAILER

- Overall Length.....: 12500 mm
- Width.....: 2480 mm
- Chassis.....: ST 52 material "I" profile it is produced with gas welding, it has high quality strength
- King Pin.....: 2" king – pin detachable from below made by SAE standards 8 bolt type.
- Axles.....: 3 x 12000 kg carrying capacity SERIN brand
- Loading Capacity.....: 40 ton
- Distance Between the Axles.....: 1320 mm
- Brake And Air Suspension System.....: Air Suspension, Drum Brake System, WABCO Brake System
- Base Floor & Container Lock.....: Skeleton, 12 Piece Container Locked, 1 PCS 40, 2 PCS 20 Container, 1 PCS 30 Container
- Landing Gear.....: Double Speed, 24000 kg carrying capacity, Jost brand mechanical Landing Gears,
- Rear Bumper.....: Suitable 70/221 / AT-version of the rear bumper,
- Chocks and Protective Barriers.....: Carriers with 1 unit wheel chock
- Mud Guards.....: 2 PCS galvanized steel mudguards with plastic edges.
- Tires and Rims.....: 6 +1 PCS 385 / 65 R 22,5
- Spare Wheel Carrier.....: 1 piece tire carrier
- Boxes.....: 1 unit Tool Box, 1 units of 6 kg of fire tube and plastic carriers
- Water Tank.....: 60 lit water tank which is made of stainless steel.
- Paint.....: Material cleaned and grit (metal) material is blasting, 2 Floor Epoxy primers are made and the desired color, In the final layer is painted with 2 coats acrylic paint,
- Electric Installation and Lightning System...: There are amber-colored lights in the side by 3 units, Park at the rear lamps, License plate lamp, Reflector triangles, Electrical system; Flame proof electrical system 2 X 7-pin electrical socket.
- Accessories.....: Hub key, Axles Bolt Nut key, Tool box keys,

**Optional**

**: 1.Double Tire Mechanical Suspension, 2.Spare Fuel Tank 1500 liters**

[www.reisteyler.com.tr](http://www.reisteyler.com.tr)



TSEK



TÜV AUSTRIA ISO 9001:2008

TÜV AUSTRIA ISO 14001:2004

TÜV AUSTRIA OHSAS 18001:2007

**REISTREYLER**

Serin Otomotiv A.Ş., reserves the right of making changes in the technical specifications and components with-out making any prior notice. Some components seen on the photographs and specifications seen here may not be standard features of the vehicles. There may have been some changes after publication of this document (January 2014). No right can be claimed on a sign or numbers used by seller or buyer to define a product on ordering. Differences in colors are due to printing techniques.

SERİN Otomotive A.Ş.  
Evrenköy Caddesi No.30, Sok  
No:12 Selçuklu / KONYA  
Tel: (0 332) 2390690  
Fax: (0 332) 2390689  
Mail: [sales@reistreyler.com.tr](mailto:sales@reistreyler.com.tr)